



RETRACTABLE TARPS PT.

Let us help you cover your load

RR-CSU1.0 STANDALONE BATTERY BOX WIRING DIAGRAM

28-30 Terrence Road Brendale QLD 4500



PO Box 5623, Brendale QLD 4500

Phone 07 3889 9611, Fax 07 3889 9622

Email: sales@retractabletarps.com.au

SYSTEM INPUTS 12/24 Volt

- Positive Connected directly to battery
- Negative **must** be grounded to chassis
- Existing System must be capable of supplying 6 Amps

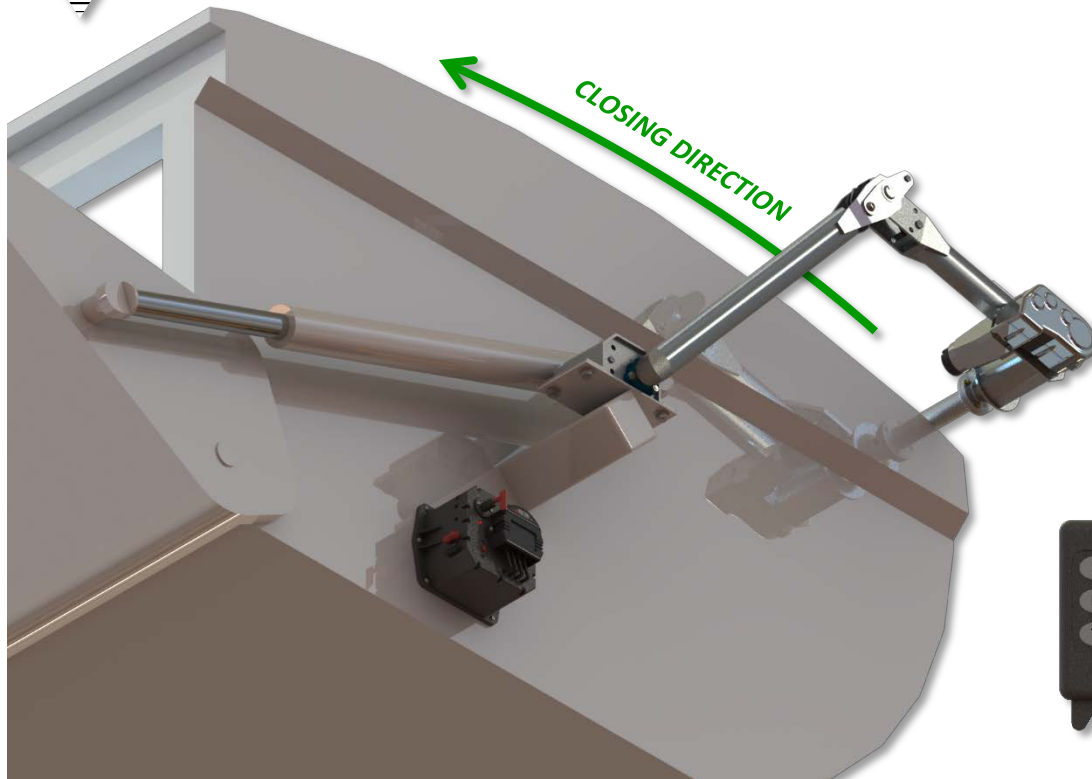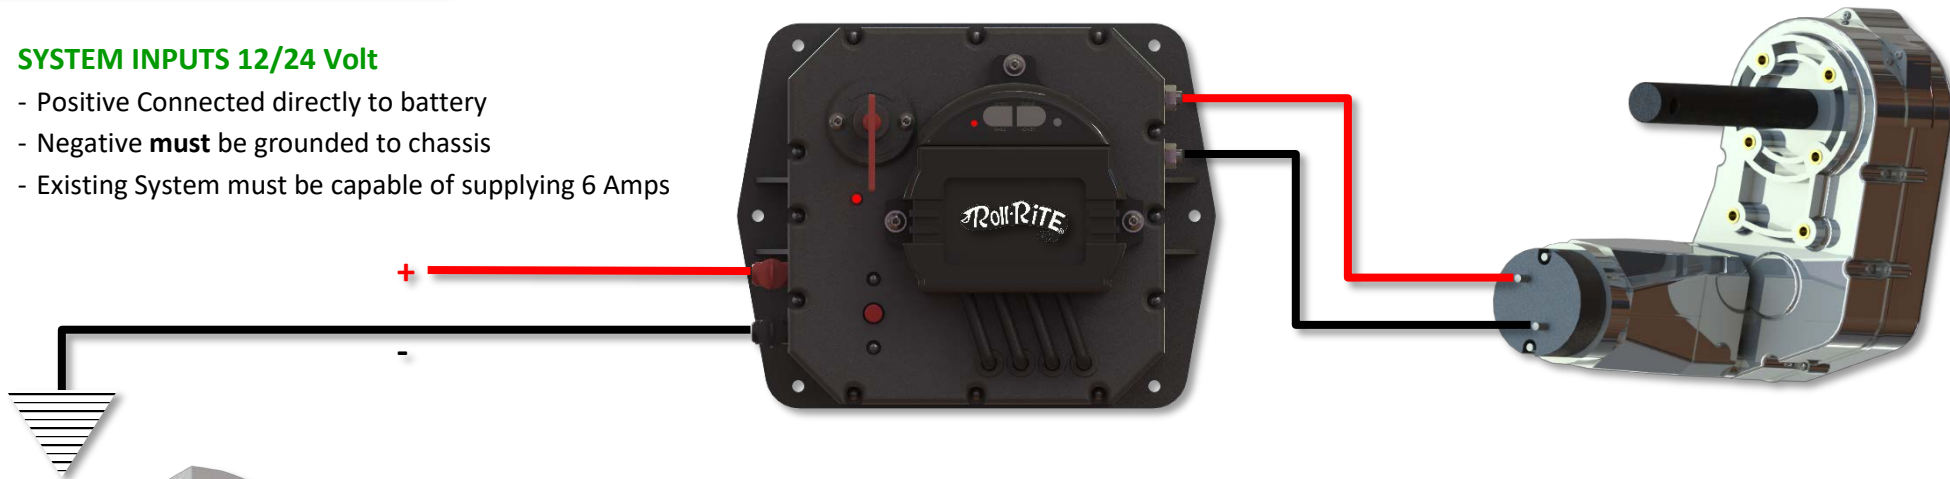

RITE TOUCH OPERATION

- ⇒ Hold Button < 0.750 seconds = Incremental inching
- ⇒ Hold Button 0.750 – 2.500 seconds = Automatic Operation
- ⇒ Hold Button > 2.500 seconds = Press and Hold Operation

Any Failure to Comply with these conditions will result in a voided warranty, if unsure, please contact our office with any installation queries.

PLEASE NOTE

1. Controller is a one touch remote control. It is **extremely important** that the close button closes and open button opens.
2. 10 Amp fuse must be fitted as a close to truck battery as possible
3. All cable from standalone battery through to the motor must be 6 B&S or thicker

