




HYDRAULIC SCHEMATIC

28-30 Terrence Road Brendale QLD 4500
PO Box 5623, Brendale QLD 4500
Phone 07 3889 9611, Fax 07 3889 9622
Email: sales@retractabletarps.com.au

FOR IDEAL OPERATING EFFICIENCY

- MAXIMUM FLOWRATE: 20 L/min
- MAXIMUM OPERATING PRESSURE: 1250 PSI
- MINIMUM HOSE DIAMETER: ½"

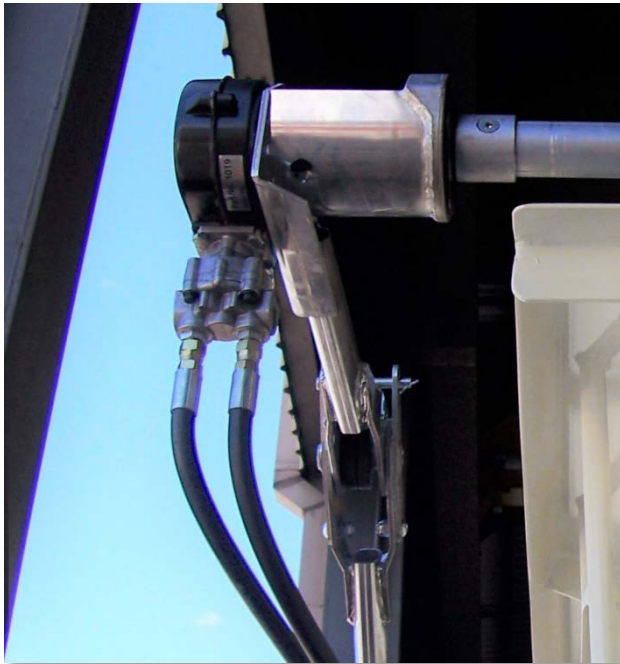

NOTE: we do not supply hydraulic lines, fittings or control/spool valves. It is important to ensure that the hydraulic motors are operated at the correct specification noted above.

FOR ANY FURTHER ENQUIRES, CONTACT OUR SALES TEAM

