



MAIN CONTROL PLATE

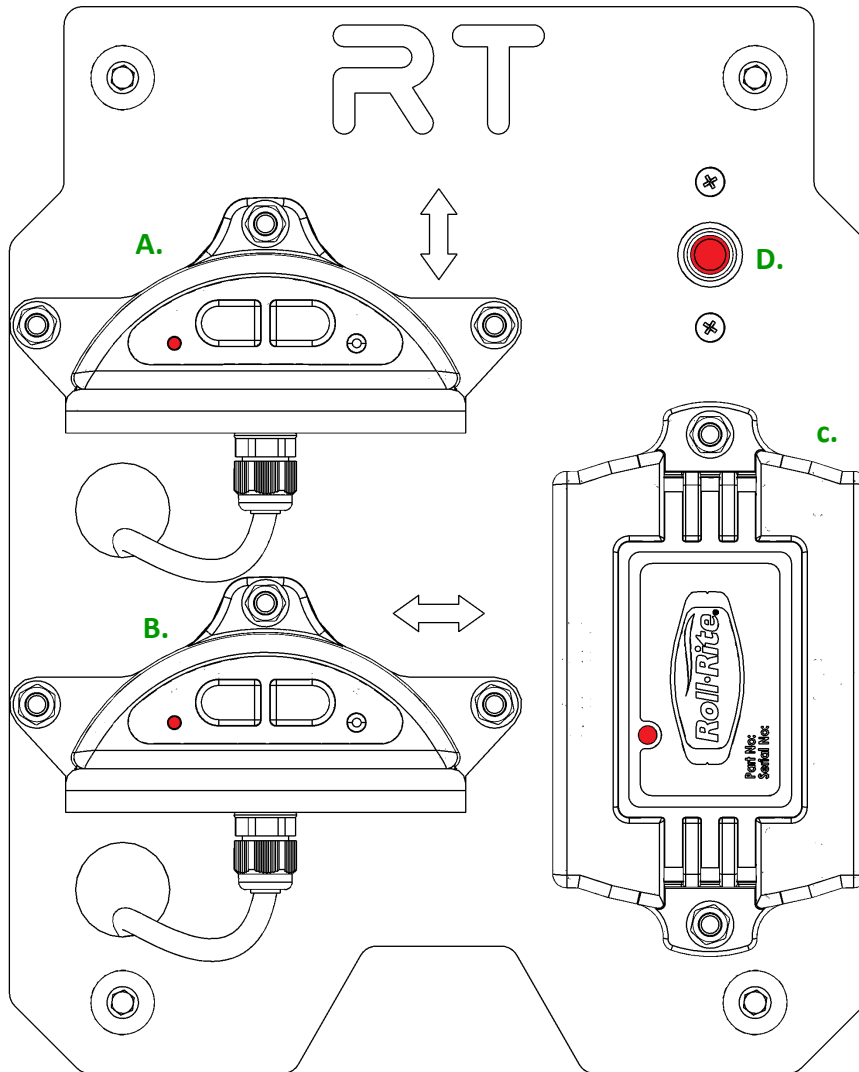

ACCOMPANYING 6-BUTTON KEY FOB

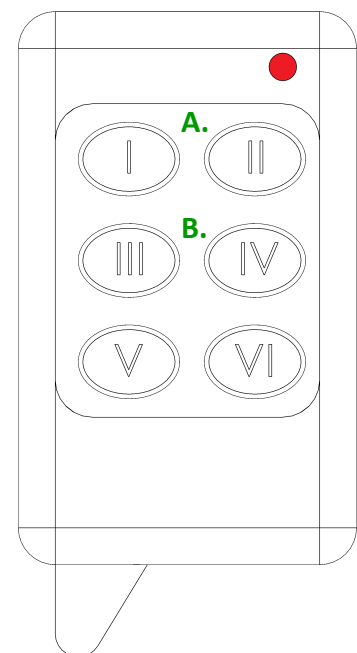

CONTROL PLATE LAYOUT

- A. Tower Raise and lower receiver (Row 1 on Remote)
- B. Spool and unspool receiver (Row 2 on Remote)
- C. Spool motor control unit
- D. System circuit breaker

NOTE

- Both receivers **must** be turned on after connecting system to power prior to use.
- Receivers are turned on by pressing and holding both large buttons on the SFREM for 6 seconds until the red status light turns on.
- The Receivers can also be activated via the remote keyfob. Simply press and hold both buttons of the row that triggers the receiver you are wishing to power up. Row 1 is raise/lower and row 2 is spool/unspool.
- Receivers will remain on indefinitely until power is disconnected or they are powered down. Auto shutoff times can be programmed in using our SFREM information available on our website.