




RE-PROGRAMMING - 2 BUTTON KEY FOB GUIDE

HINTS*

- Included keyfob is pre-programmed to match the included receiver.
- Program all keyfobs required at the same time, separate programming may erase previously programmed keyfobs.
- Receiver can store codes for multiple keyfobs.

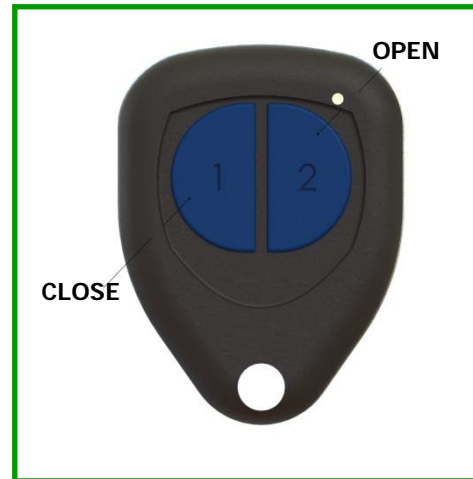

Programming Instructions:

- 1) Disconnect power to the control unit, this can be done either by disconnecting 175Amp connector plug or removing negative terminal on DMC.
- 2) Press and hold down button "1" on the remote Keyfob, whilst keeping the button depressed, reconnect power to the control unit.
- 3) Wait until the control unit completes its initialization cycle indicated by the three flashing led indicators on the front panel and release the button on the Keyfob.
- 4) Test the keyfobs to ensure that they all operate as expected.
- 5) One keyfob can be programmed to multiple controllers, using the keyfob you wish to use for all units, follow the above programming instructions on each controller individually whilst using the same keyfob.

Erasing Instructions:

- If one keyfob is accidentally programmed to two control units and you wish to erase one of the keyfobs from the erroneous control unit you must:-
- 1) Find the appropriate keyfob for each control unit and keep them separate from each other.
 - 2) Reprogram the keyfob to the correct unit following the above procedure.
 - 3) Repeat the reprogramming step multiple times, it may take up to 20 times. This will erase the memory of the wrong keyfob in the control unit.